

Energy Efficiency in Smart Buildings through IoT Sensor Integration

Invited Lecture

Professor Saifur Rahman

Director, Virginia Tech Advanced Research Inst., USA President, IEEE Power & Energy Society 2018 & 2019

IEEE Saskatchewan North & South Sections, 11 August 2020

Purpose and Objectives

- Buildings consume over 40% of the total energy consumption in the U.S. Over 90% of the buildings in the U.S. are either small-sized (<5,000 square feet) or medium-sized (between 5,000 sf and 50,000 sf). These buildings typically do not use Building Automation Systems (BAS) to monitor and control their building systems from a central location.
- WiseBldg platform facilitates energy efficiency applications in commercial buildings using a very simple and scalable building automation system (BAS).



An Open Architecture Platform for Building Energy Efficiency

WiseBldg is a Building Energy Management Open Architecture Software solution that is engineered to improve sensing and control of <u>all</u> IoT-enabled equipment in commercial buildings

www.bemcontrols.com

Three major loads in buildings

- Heating, Ventilation, AC
- Lighting loads
- Plug loads


Value:

Monitoring and control:

Improves energy efficiency and facilitates peak load savings in buildings



WiseBldg supports multiple IoT devices through industry standard protocols and communications technologies

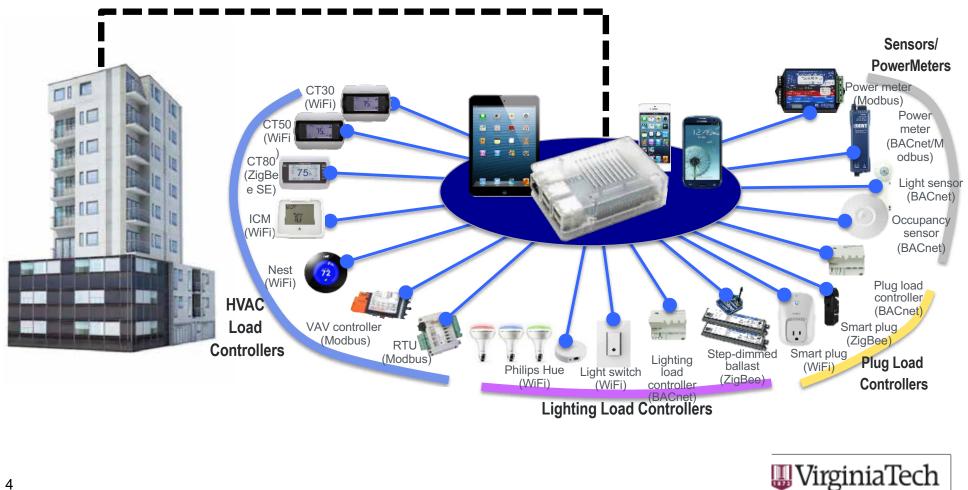

Invent the Future



Communication Technologies

- Ethernet (IEEE 802.3)
- Serial Interface (RS-485)
- **ZigBee (IEEE 802.15.4)**
- 🖵 WiFi (IEEE 802.11)




Data Exchange Protocols

- BACnet (IP and MS/TP)
- Modbus (RTU and TCP)
- Web (e.g., XML, JSON, RSS/Atom)
- ZigBee API
- Smart Energy (SE)
- OpenADR (Open Automated Demand Response)



WiseBldg Platform Built by BEM Controls

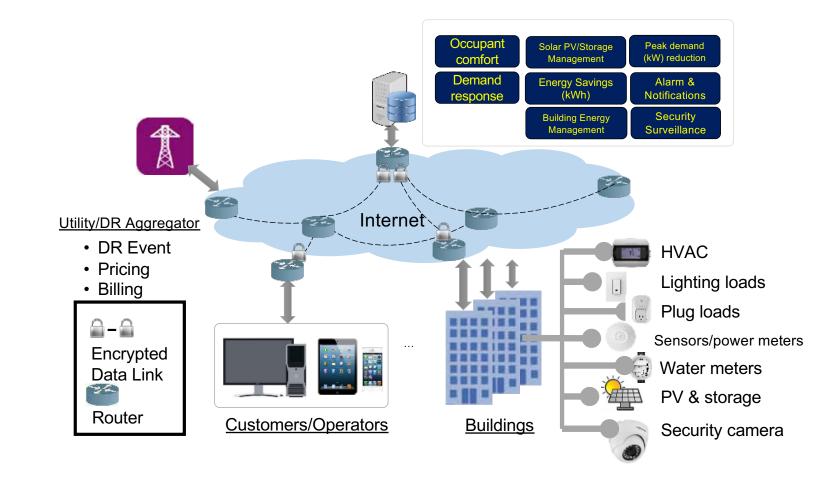





WiseBldg can make an old building smart



Customers colling buildings optimized for savings

Measured energy savings across deployments

- **20%** HVAC Energy Savings
- **25%** Lighting Energy Savings

Improved operations and maintenance: WiseBldg analytical platform enables operators to detect faults when devices operate outside standard thresholds enabling building operators to investigate prior to device failure.

Occupant satisfaction: spaces controlled by WiseBldg have been more comfortable due to more consistent temperature profiles and healthier air quality through consistent monitoring of environmental factors (CO2 levels, PM 2.5).









9

Building 1 – VT Classroom Building

- Location: Alexandria, VA
- Demonstration: HVAC, plug load control

Building 2 – Equipment Bureau Building

- Location: Arlington, VA
- Demonstration: Lighting control



Building 3 – VT Lab Building

- Location: Blacksburg, VA
- Demonstration: HVAC control

Building 4 – PG County Community Building

- Location: Camp Springs, MD
- Demonstration: HVAC control




Building 1 – VT Building in Alexandria, VA





Classroom under Real-time Monitoring

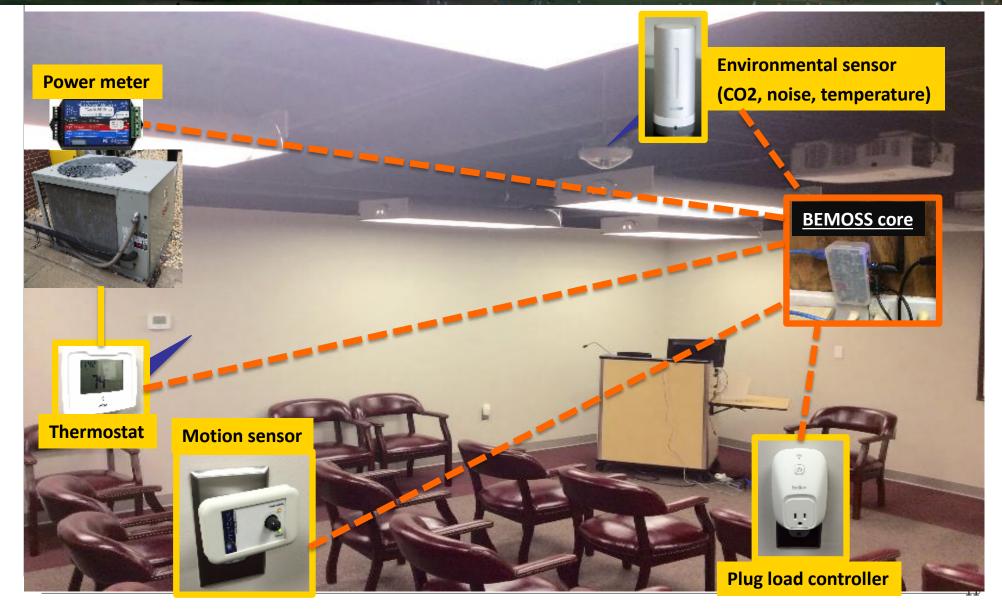

Indoor Environmental Monitoring

BemosS

🛉 Admin 🛛 🖕 Log Out



Energy and Peak Savings from HVAC Control

Location: Alexandria, VA Area: 25,000 square feet Deployed Devices

- 6 Thermostats
- 6 Power meters
- 1 Li-ion battery
- 1 Environmental sensor

Using WiseBldg, Building Operator saved 27% on HVAC consumption alone


Summer Months (June-July-August)

8,340 kWh
6,071 kWh
26.8% savings



Temperature profile BEFORE WiseBldg Demand Reduction

Temperature profile AFTER WiseBldg Demand Reduction

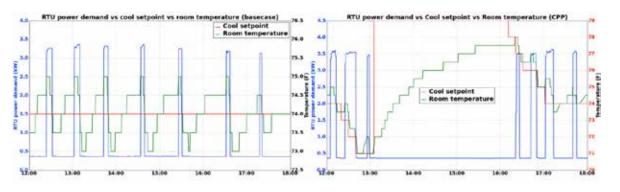

Base case (w/o WiseBldg)

- Setpoint: 74 deg F
- Energy usage = 2.72kWh
- Max demand = 3.98kW

Managed by WiseBldg

- Setpoint: 77 deg F
- Energy usage = 1.42kWh
- Max demand = 0.5kW





Office building size: 5,000 sqft



Location: Arlington, VA

Area: 5,000 sq ft

Deployed Devices

- 3 Lighting controllers
- 1 Power meter





Oct 2016	Nov 2016	Dec 2016	Jan 2017	Feb 2017	Mar 2017	Apr 2017	May 2017	Jun 2017	AVERAGE
33.7%	33.9%	34.4%	33.4%	35.9%	36.2%	35.0%	36.0%	36.3%	34.5%



Energy Savings by controlling light intensity

Month	Total Measured Energy Consumption (kWh)	Total Calculated Energy Consumption without Dimming (kWh)	Energy Savings by Dimming (%)
October 2016	264.37	399.90	33.89%
November 2016	278.13	423.78	34.37%
December 2016	280.76	426.40	34.16%
Total (October- December)	823.26	1250.08	34.14%

<u>Note:</u> Scheduled dimming level from 6:30am to 9:00pm. Open office area A: 50%; Open office area B: 45%; Chief office's desk area: 60%; Chief office's meeting area: 50%; Conference room A: 50%; Conference room B: 45%. Lights are off after 9:00pm.

nia lec







Solar Panels in Winter





WiseBldg User Interface













Battery Storage Data Access from WiseBldg









UrginiaTech



Home

WiseBldg Ser

Services Case

Case Studies

About Us

Take a Tour

All Buildings should be Smart Buildings

Building Automation Systems (BAS) can slash power consumption and energy bills significantly, but they are too expensive for most buildings.

BEM Controls breaks through this barrier.

Our Wise Building (WiseBldg) platform is affordable and works with any existing loads to make any building smart, no matter the size or age. www.bemcontrols.com

I would like to see a broader IEEE

We need to ensure that we are "READY FOR RECOVERY", when we get back to the "NEW NORMAL" after COVID-19. Let us enhance cooperation, collaboration and community spirit.

For this we need to make IEEE broader so that IEEE is more relevant to the work our members do regardless where they work.

We need more participation from volunteers globally in IEEE governance. A broader based IEEE will make the Institute more relevant to technologists and academics from all parts of the world.





Prof. Saifur Rahman (s.rahman@ieee.org)



Past-President of IEEE Power & Energy Society Past-Chair, IEEE Publication Services & Products Board

PES accomplishments: PES University PES Corporate Engagement Program PES Chapters' Councils in China, India, Africa and Latin America

website: <u>https://www.srahman.org.</u>



